




User Manual  
SKU: ABX00108

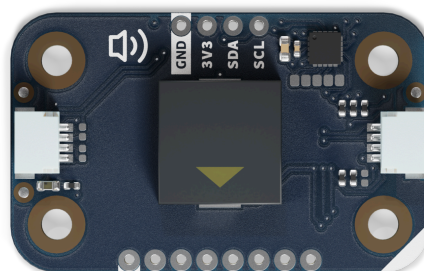

## Description

The Modulino® Buzzer, powered by an on-board **STM32C011F4** microcontroller, provides a compact and versatile way to generate sound alerts and tones through I2C control. Perfect for audible notifications, alarm systems, or simple musical applications in IoT and maker projects.

## Target Areas

Maker, beginner, education

---



# Contents

<b>1 Application Examples</b>	<b>3</b>
<b>2 Features</b>	<b>4</b>
2.1 Contents	4
<b>3 Related Products</b>	<b>4</b>
<b>4 Rating</b>	<b>4</b>
4.1 Recommended Operating Conditions	4
<b>5 Power Tree</b>	<b>5</b>
<b>6 Block Diagram</b>	<b>5</b>
<b>7 Functional Overview</b>	<b>6</b>
7.1 Technical Specifications (Module-Specific)	6
7.2 Pinout	7
7.3 Power Specifications	9
7.4 Mechanical Information	9
7.5 I2C Address Reference	10
7.5.1 Pull-up Resistors	11
<b>8 Device Operation</b>	<b>11</b>
<b>9 Certifications Summary</b>	<b>12</b>
<b>10 Declaration of Conformity CE DoC (EU)</b>	<b>12</b>
<b>11 Declaration of Conformity to EU RoHS &amp; REACH 211 01/19/2021</b>	<b>2</b>
<b>12 Conflict Minerals Declaration</b>	<b>13</b>
<b>13 FCC Caution</b>	<b>13</b>



## 1 Application Examples

- **Audible Alerts** Integrate a buzzer notification when a sensor reading crosses a threshold (e.g., temperature limit, motion detected).
- **Alarm & Security Systems** Produce warning tones in response to environment triggers or user-defined events.
- **Interactive Learning Tools** Combine with other Modulino® nodes (e.g., buttons, sensors) to create hands-on educational projects showcasing real-time sound feedback.



## 2 Features

- **PKLCS1212E4001** buzzer controlled by an **STM32C011F4** microcontroller over I2C (Qwiic).
- Operates at **3.3V** (in line with Qwiic standards, 2.0–3.6V MCU range).
- **SWD** header for optional reprogramming or custom sound logic.
- Ideal for **alarm tones**, **status beeps**, or **simple audio feedback**.

### 2.1 Contents

SKU	Name	Purpose	Quantity
ABX00108	Modulino® Buzzer	Produce sounds or alerts via I2C control	1
	I2C Qwiic cable	Compatible with the Qwiic standard	1

## 3 Related Products

- *SKU: ASX00027* – Arduino® Sensor Kit
- *SKU: K000007* – Arduino® Starter Kit
- *SKU: AKX00026* – Arduino® Oplà IoT Kit

## 4 Rating

### 4.1 Recommended Operating Conditions


- **Microcontroller supply range:** 2.0V – 3.6V (STM32C011F4)
- **Powered at 3.3V** through the Qwiic interface (in accordance with the Qwiic standard)
- **Operating temperature:** –40 °C to +85 °C

#### Typical current consumption:

- ~6.4mA when buzzer is active

## 5 Power Tree

The power tree for the modulino can be consulted below:

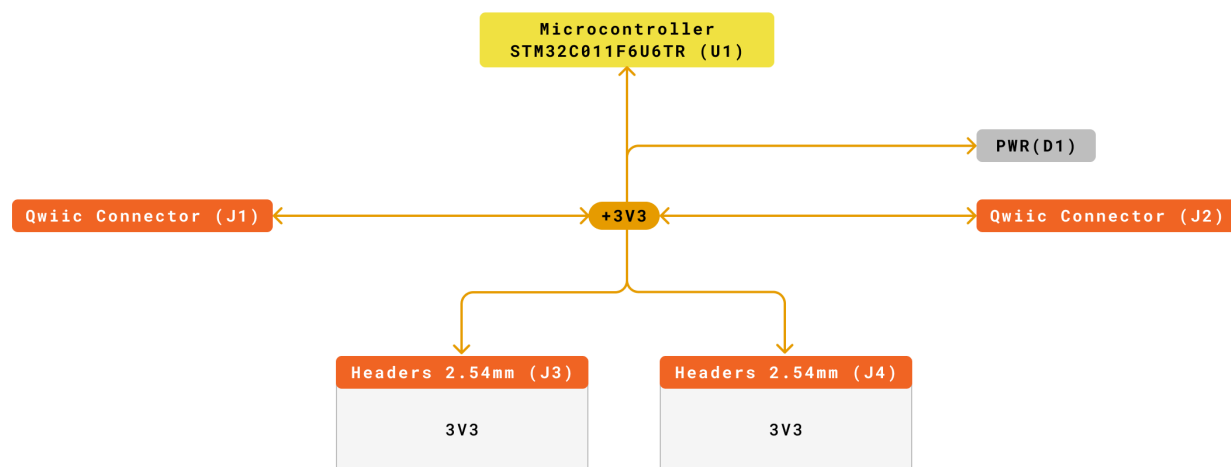


<b>Legend:</b>		
<span style="color: red;">■</span> VIN	<span style="color: yellow;">■</span> Main Part	<span style="color: orange;">■</span> +3V3
<span style="color: blue;">■</span> VBUS	<span style="color: gray;">■</span> Internal Part	<span style="color: purple;">■</span> +5V

Modulino Buzzer  
 SKU code: ASX00108  
 Power Tree  
 Last update: 05 Feb, 2025

Modulino® Buzzer Power Tree

## 6 Block Diagram

This module features an STM32C011F4 microcontroller that drives a PKLCS1212E4001 buzzer. It communicates with the host over I2C (Qwiic). Advanced users can reprogram the MCU for custom audio patterns or logic.

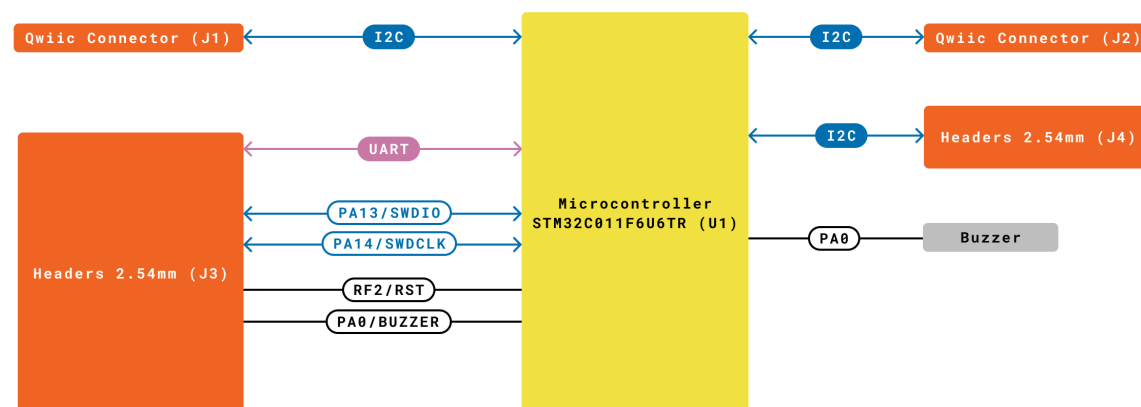

Legend:		Connector	I2C/I2S	Other SERIAL
		Main Part	SPI	
		Internal Part	UART	



Modulino Buzzer  
SKU code: ADX90188  
Block Diagram  
Last update: 05 Feb, 2025

Modulino® Buzzer block diagram

## 7 Functional Overview

The Modulino® Buzzer node receives sound commands or frequency/tone data via I2C. The STM32C011F4 microcontroller then drives the buzzer, producing audible tones or beeps. For more advanced usage, users can re-flash the firmware via SWD to generate custom waveforms or integrate additional logic.

### 7.1 Technical Specifications (Module-Specific)

Specification	Details
Microcontroller	STM32C011F4
Accuracy	ADC: $\pm 2$ LSB typical INL
Resolution	12-bit ADC
Actuator	PKLCS1212E4001 buzzer
Supply Voltage	Min: 2.0V, Max: 3.6V
Power Consumption	~6.4 mA (buzzer active)
Accuracy	ADC: $\pm 2$ LSB typical INL (for advanced usage)
Resolution	12-bit ADC (potential for custom expansions)
Communication	I2C (Qwiic), SWD, optional UART if reprogrammed



## 7.2 Pinout

### Qwiic / I2C (1×4 Header)


Pin	Function
GND	Ground
3.3V	Power Supply (3.3V)
SDA	I2C Data
SCL	I2C Clock

These pads and the Qwiic connectors share the same I2C bus at 3.3V.

### Additional 1×8 Header (Buzzer & MCU Signals)

Pin	Function
PA0	Buzzer signal (PWM)
RX1	UART Receive
TX1	UART Transmit
SWDIO	SWD Data
SWCLK	SWD Clock
PF2	NRST (Reset)

**Note:** You can drive the buzzer with custom signals (PWM supplied to the PA0 pin) or reprogram the STM32C011F4 via SWD for alternate modes or advanced functionality.

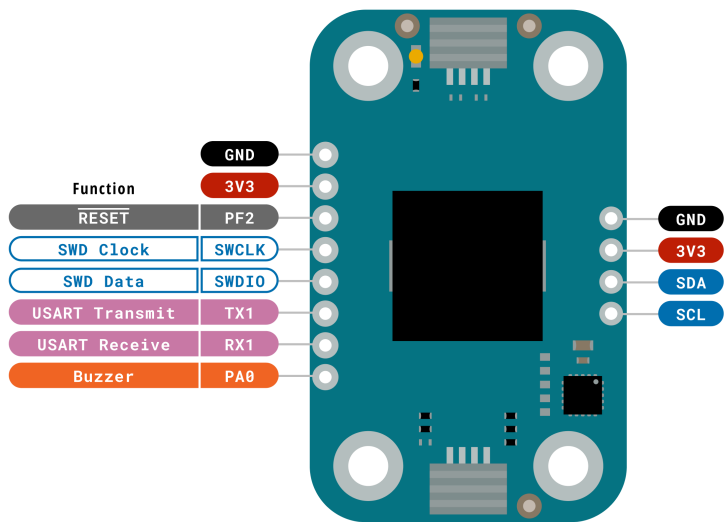


Legend:	Digital	I2C	Other SERIAL
	Power	SPI	Analog
	Ground	UART/USART	PWM/Timer
	Main Part		

Modulino Buzzer  
SKU code: ABX00108  
Pinout  
Last update: 18 Jun, 2024

Pinout Overview



- **Nominal operating voltage:** 3.3V via Qwiic
- **MCU voltage range:** 2.0V–3.6V

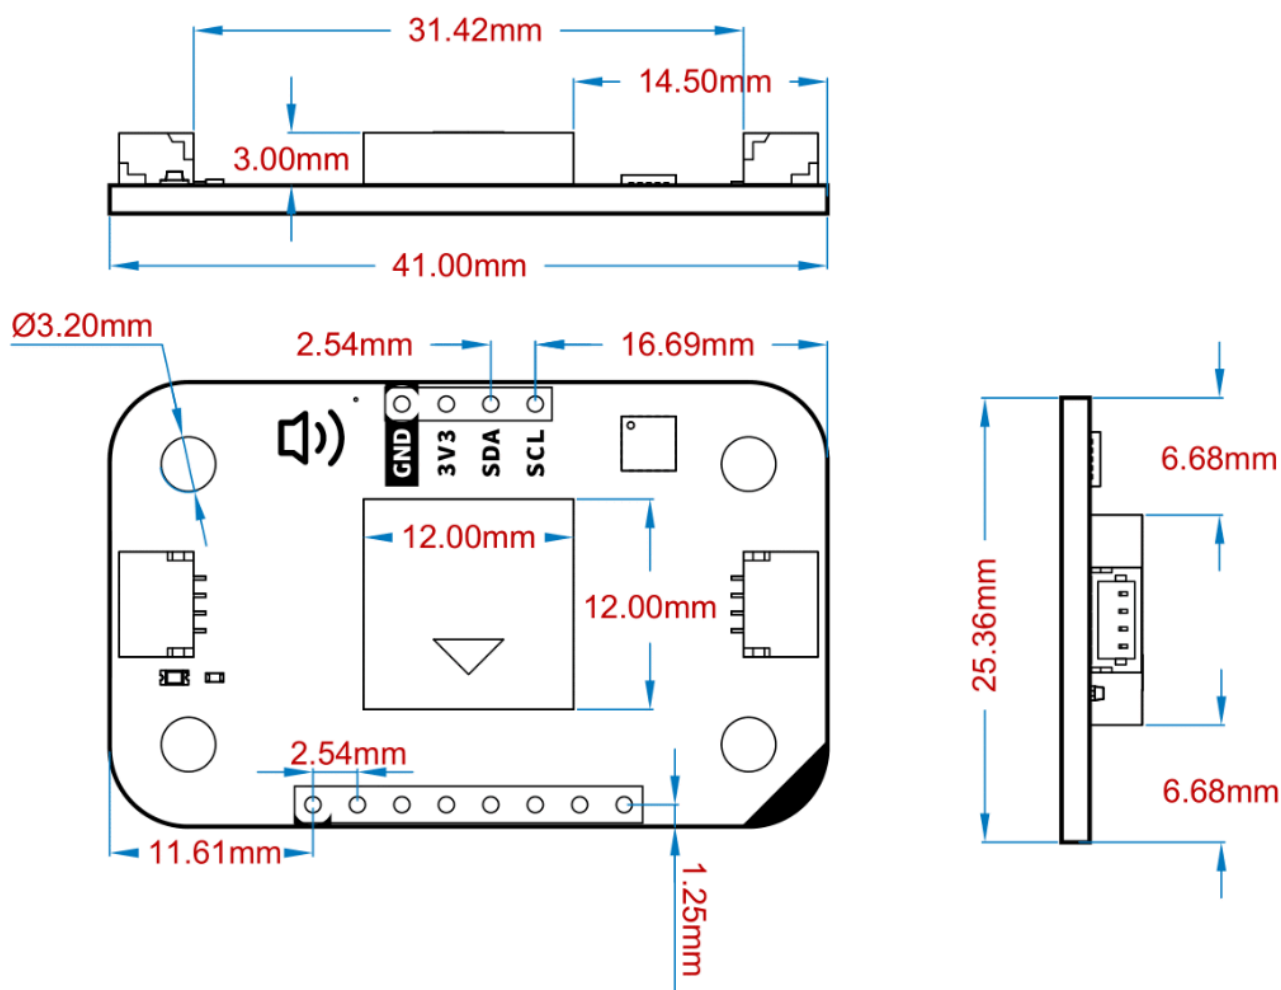

### Modulino® Buzzer Mechanical Information


- Board dimensions: 41 mm × 25.36 mm
- Thickness: 1.6 mm (±0.2 mm)
- Four mounting holes (Ø 3.2 mm)
  - Hole spacing: 16 mm vertically, 32 mm horizontally



7.5 I2C Address Reference

Board Silk Name	Sensor/Actuator	Modulino I2C Address (HEX)	Editable Addresses (HEX)	Hardware I2C Address (HEX)
MODULINO BUZZER	1× Buzzer	0x3C	Any custom address (via FW config)	0x1E

**Note:** Default address is **0x3C**, but custom firmware can reassign it. Check your library or code for details.

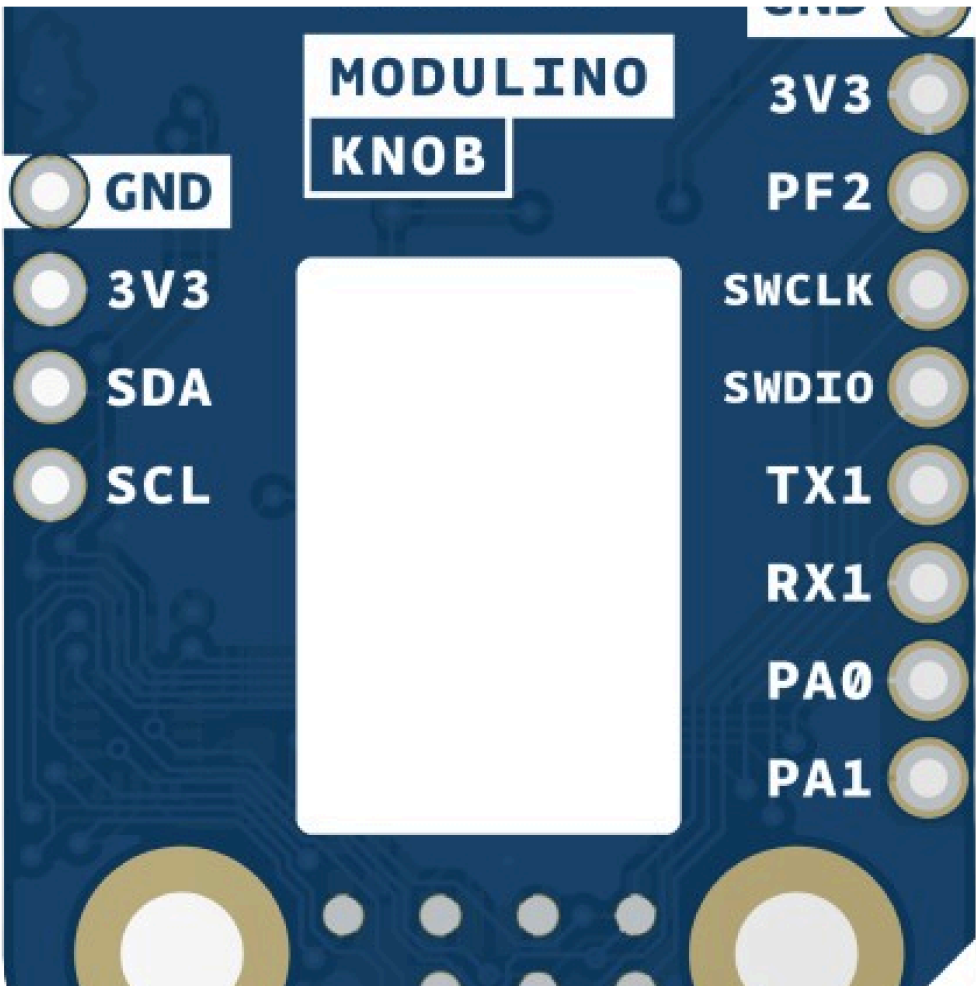


Blank silk for identification

### 7.5.1 Pull-up Resistors

The module has pads for optional I2C pull-up mounting in both data lines. No resistors are mounted by default but in case the resistors are needed 4.7 K resistors in an SMD 0402 format are recommended.

These are positioned near the Qwiic connector on the power LED side.

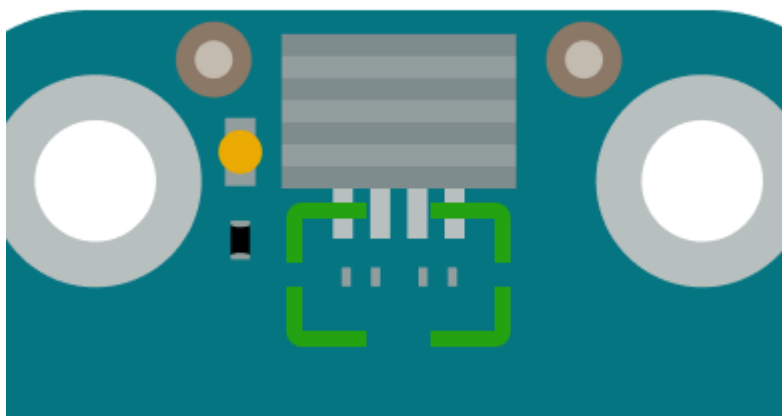

*Generic pull-up resistor position*

## 8 Device Operation

By default, the Modulino® Buzzer node responds to I2C commands to produce tones or beep patterns. You can integrate it with the Arduino IDE or any 3.3V microcontroller environment. Advanced users may flash custom code via the SWD header to implement unique waveforms or logic.



# Certifications

## 9 Certifications Summary

Certification	Status
CE/RED (Europe)	Yes
UKCA (UK)	Yes
FCC (USA)	Yes
IC (Canada)	Yes
RoHS	Yes
REACH	Yes
WEEE	Yes

## 10 Declaration of Conformity CE DoC (EU)

We declare under our sole responsibility that the products above are in conformity with the essential requirements of the following EU Directives and therefore qualify for free movement within markets comprising the European Union (EU) and European Economic Area (EEA).

## 11 Declaration of Conformity to EU RoHS & REACH 211 01/19/2021

Arduino boards are in compliance with RoHS 2 Directive 2011/65/EU of the European Parliament and RoHS 3 Directive 2015/863/EU of the Council of 4 June 2015 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

Substance	Maximum limit (ppm)
Lead (Pb)	1000
Cadmium (Cd)	100
Mercury (Hg)	1000
Hexavalent Chromium (Cr6+)	1000
Poly Brominated Biphenyls (PBB)	1000
Poly Brominated Diphenyl ethers (PBDE)	1000
Bis(2-Ethylhexyl) phthalate (DEHP)	1000
Benzyl butyl phthalate (BBP)	1000
Dibutyl phthalate (DBP)	1000
Diisobutyl phthalate (DIBP)	1000

Exemptions: No exemptions are claimed.

Arduino Boards are fully compliant with the related requirements of European Union Regulation (EC) 1907 /2006 concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH). We declare none of the SVHCs (<https://echa.europa.eu/web/guest/candidate-list-table>), the Candidate List of Substances of Very High

Concern for authorization currently released by ECHA, is present in all products (and also package) in quantities totaling in a concentration equal or above 0.1%. To the best of our knowledge, we also declare that our products do not contain any of the substances listed on the "Authorization List" (Annex XIV of the REACH regulations) and Substances of Very High Concern (SVHC) in any significant amounts as specified by the Annex XVII of Candidate list published by ECHA (European Chemical Agency) 1907 /2006/EC.

## 12 Conflict Minerals Declaration

As a global supplier of electronic and electrical components, Arduino is aware of our obligations with regard to laws and regulations regarding Conflict Minerals, specifically the Dodd-Frank Wall Street Reform and Consumer Protection Act, Section 1502. Arduino does not directly source or process conflict minerals such as Tin, Tantalum, Tungsten, or Gold. Conflict minerals are contained in our products in the form of solder or as a component in metal alloys. As part of our reasonable due diligence, Arduino has contacted component suppliers within our supply chain to verify their continued compliance with the regulations. Based on the information received thus far we declare that our products contain Conflict Minerals sourced from conflict-free areas.

## 13 FCC Caution

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

### FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment.
3. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator & your body.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



English: User manuals for license-exempt radio apparatus shall contain the following or equivalent notice in a conspicuous location in the user manual or alternatively on the device or both. This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. this device may not cause interference.
2. this device must accept any interference, including interference that may cause undesired operation of the device.

French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. l'appareil nedit pas produire de brouillage.
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

#### IC SAR Warning:

English: This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

French: Lors de l'installation et de l'exploitation de ce dispositif, la distance entre le radiateur et le corps est d'au moins 20 cm.

**Important:** The operating temperature of the EUT can't exceed 85 °C and shouldn't be lower than -40 °C.

Hereby, Arduino S.r.l. declares that this product is in compliance with essential requirements and other relevant provisions of Directive 2014/53/EU. This product is allowed to be used in all EU member states.

## Company Information

Company name	Arduino SRL
Company Address	Via Andrea Appiani, 25 - 20900 MONZA (Italy)



## Reference Documentation

Ref	Link
Arduino IDE (Desktop)	<a href="https://www.arduino.cc/en/Main/Software">https://www.arduino.cc/en/Main/Software</a>
Arduino Courses	<a href="https://www.arduino.cc/education/courses">https://www.arduino.cc/education/courses</a>
Arduino Documentation	<a href="https://docs.arduino.cc/">https://docs.arduino.cc/</a>
Arduino IDE (Cloud)	<a href="https://create.arduino.cc/editor">https://create.arduino.cc/editor</a>
Cloud IDE Getting Started	<a href="https://docs.arduino.cc/cloud/web-editor/tutorials/getting-started/getting-started-web-editor">https://docs.arduino.cc/cloud/web-editor/tutorials/getting-started/getting-started-web-editor</a>
Project Hub	<a href="https://projecthub.arduino.cc/">https://projecthub.arduino.cc/</a>
Library Reference	<a href="https://github.com/arduino-libraries/">https://github.com/arduino-libraries/</a>
Online Store	<a href="https://store.arduino.cc/">https://store.arduino.cc/</a>

## Revision History

Date	Revision	Changes
14/05/2025	1	First release