


TOP VIEW

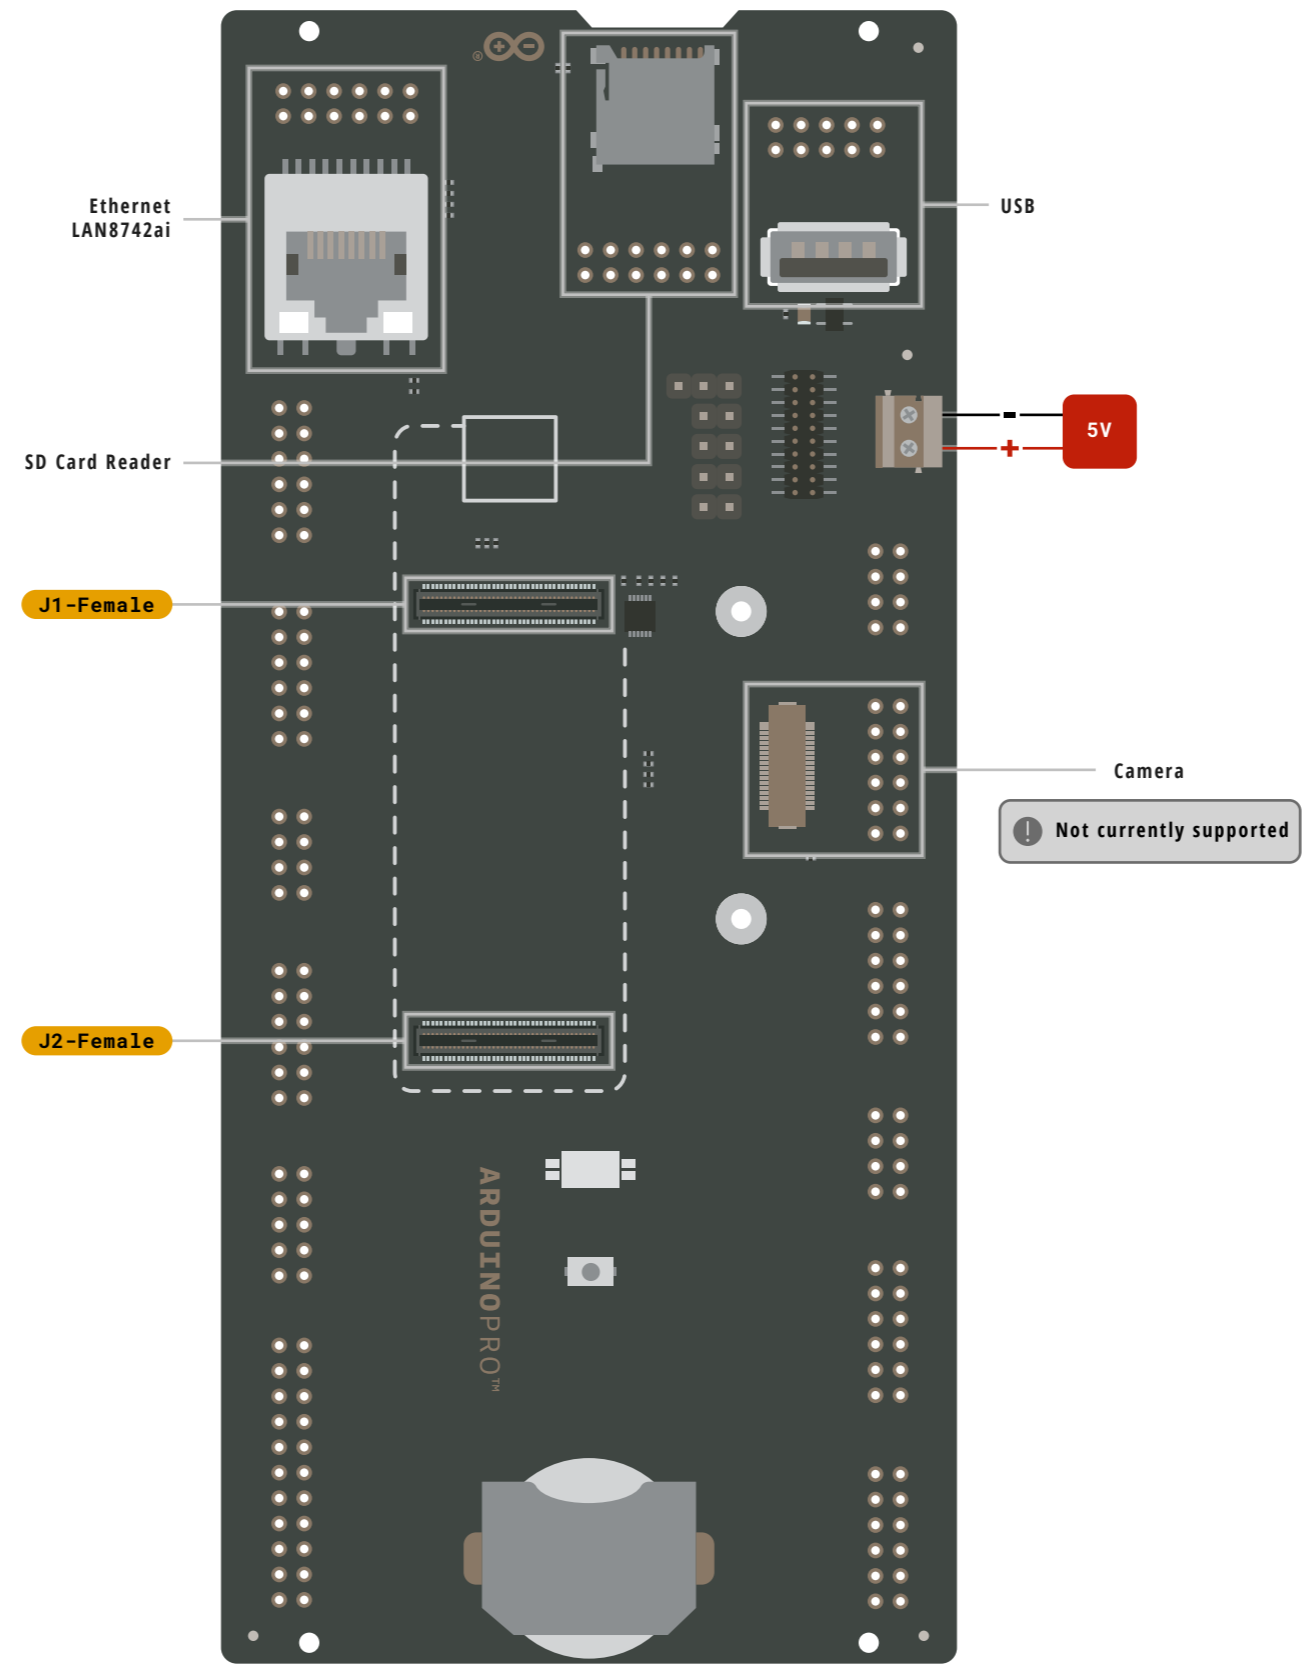

Legend:

- Power
- Ground

- Power Input
- Power Output

- GPIO Digital External
- Analog External
- Main Part
- High Density Connector pin
- Internal Component
- Other Pins (Reset, System Control, Debugging)

- LED
- RGB LED
- Short Circuit allowed functions

**POWER LIMITS**  
depend on the board used

CIP0/COPI have previously been referred to as MISO/MOSI




SKU code: ASX00031  
Full Pinout - Page 1 of 7  
Last update: 23 Feb, 2023


DOCS . ARDUINO . CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

TOP VIEW

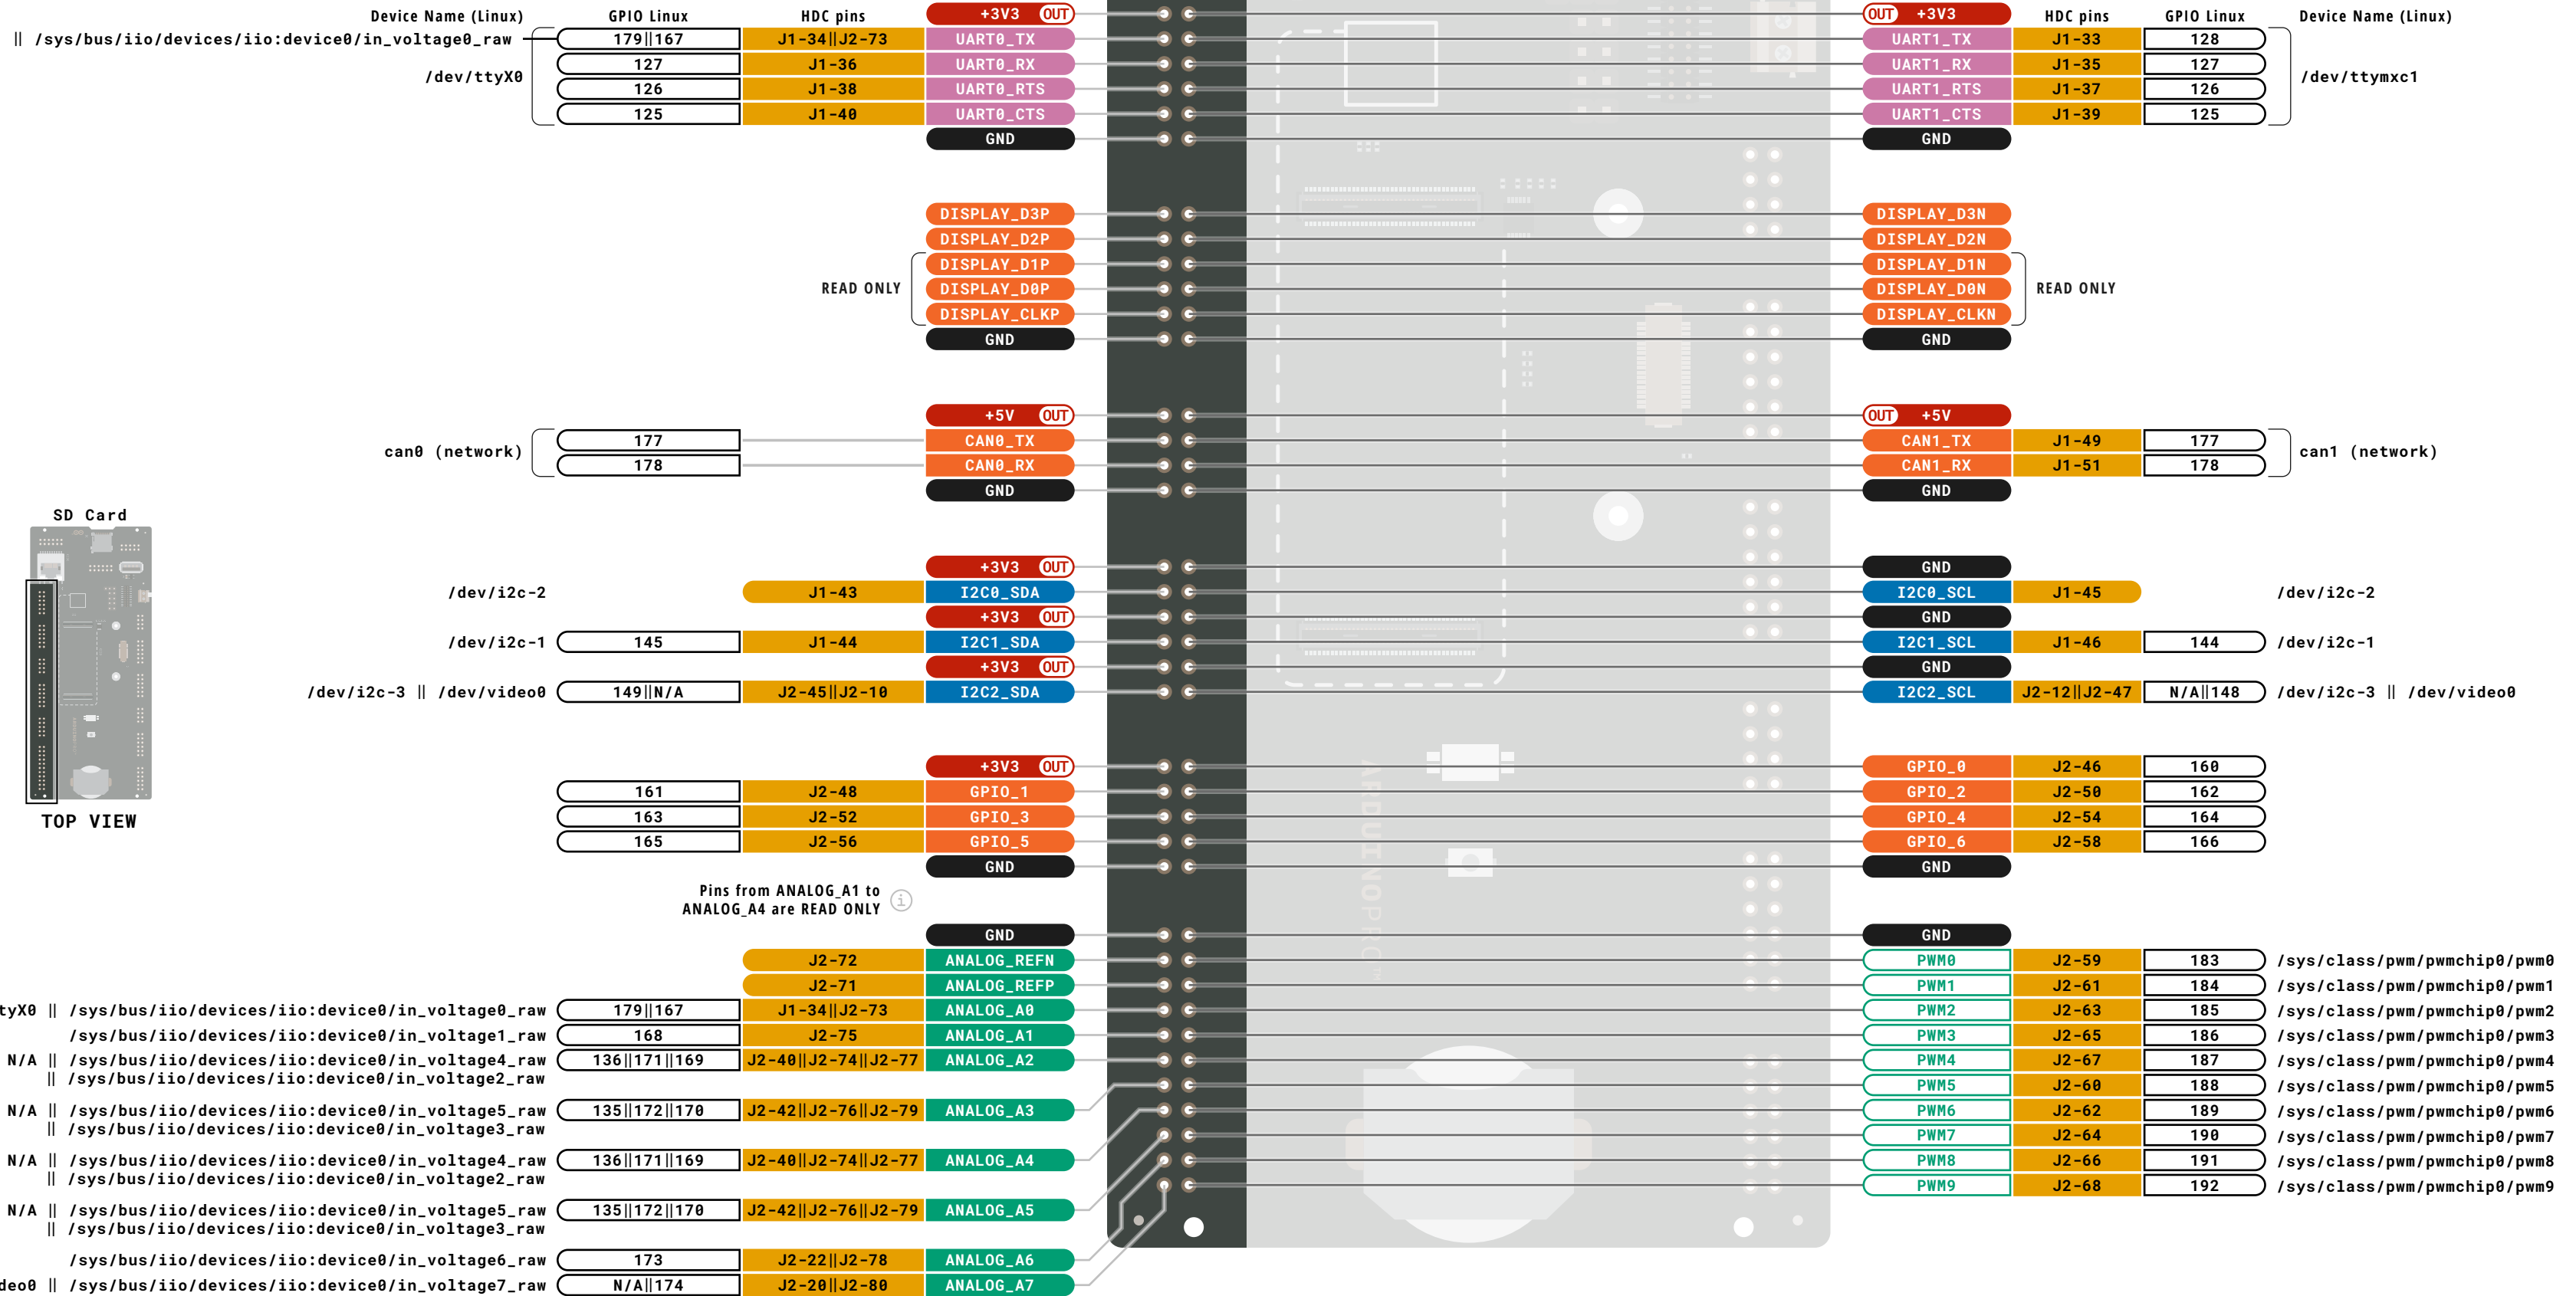

SD Card

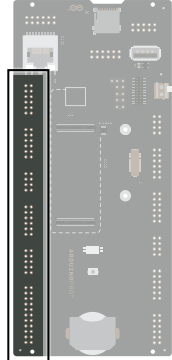

TOP VIEW

**Legend:**

- Power: Power Input (IN), Power Output (OUT), Ground
- GPIO Digital External (Orange), Analog External (Light Orange), Main Part (Yellow), Internal Component (Grey), Other Pins (Reset, System Control, Debugging) (Dark Grey)
- I2C (Blue), SPI (Light Blue), UART/USART (Purple), Other SERIAL Communication (Light Purple), Analog (Green), PWM/Timer (Light Green)
- Default (D in circle)
- LED: LED (Red), RGB LED (Rainbow), Short Circuit allowed functions (Square with diagonal line)

**POWER LIMITS** depend on the board used

**INFO** CIP0/COPI have previously been referred to as MISO/MOSI



**PORTENTA BREAKOUT ARDUINO**

SKU code: ASX00031  
Full Pinout - Page 2 of 7  
Last update: 28 Nov, 2022

**DOCS. ARDUINO. CC**

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

TOP VIEW

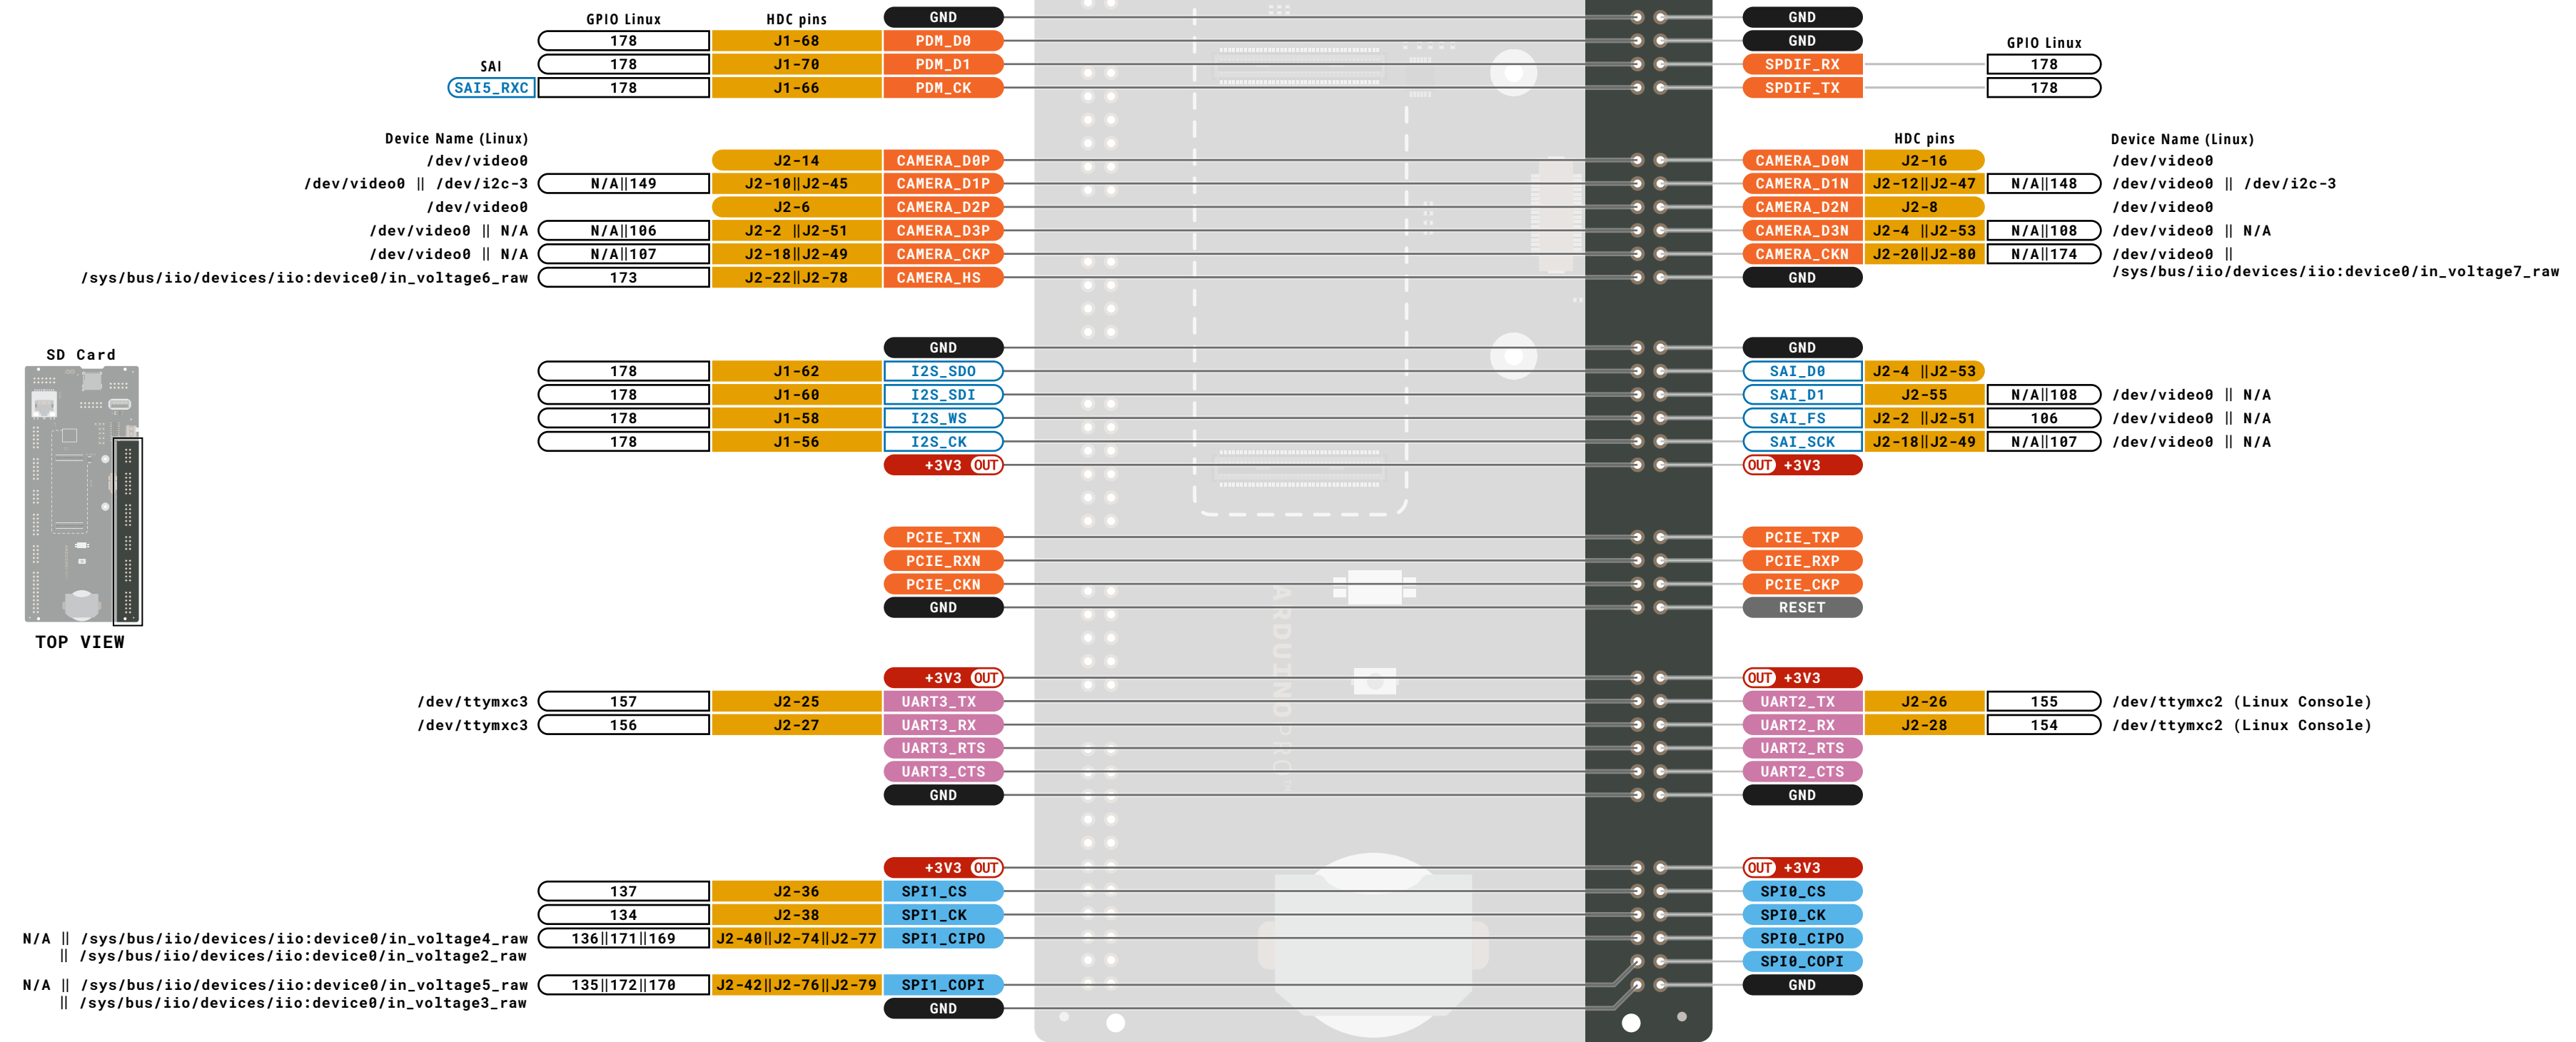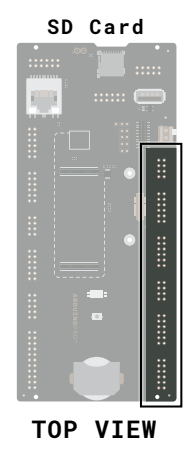

**Legend:**

- Power
- Power Input
- Power Output
- Ground
- GPIO Digital External
- Analog External
- Main Part
- High Density Connector pin
- Internal Component
- Other Pins (Reset, System Control, Debugging)
- I2C
- SPI
- UART/USART
- Other SERIAL Communication
- Analog
- PWM/Timer
- Default
- Default
- Default
- Default
- LED
- RGB LED
- Short Circuit allowed functions

**POWER LIMITS**  
depend on the board used

CIPO/COPI have previously been referred to as MISO/MOSI



**PORTENTA BREAKOUT ARDUINO**

SKU code: ASX00031  
Full Pinout - Page 3 of 7  
Last update: 28 Nov, 2022

DOCS.ARDUIANO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

**CC BY SA**

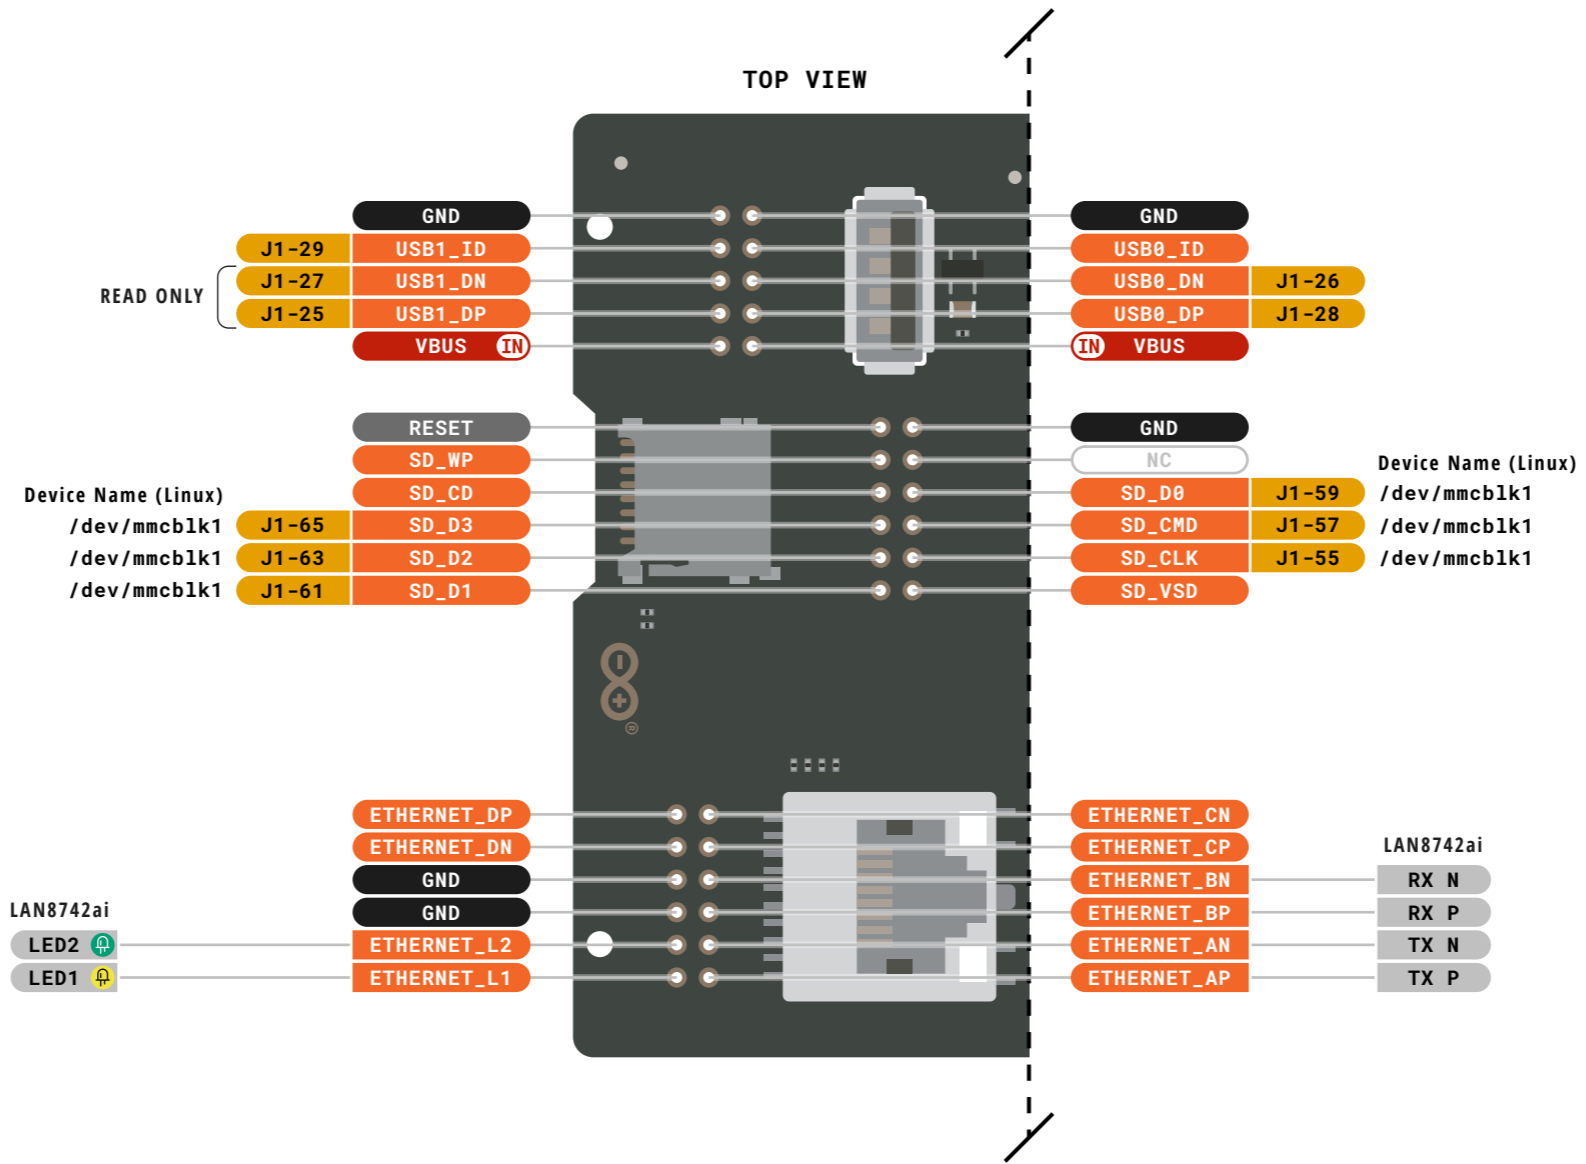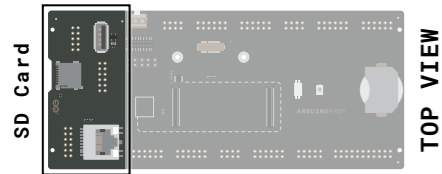

**Legend:**

- |        |              |   |                            |         |  |
|--------|--------------|---|----------------------------|---------|--|
| Power  | Power Input  | GPIO Digital External                         | I2C                        | Default | LED  |
| Ground | Power Output | Analog External                               | SPI                        | Default | RGB LED  |
|        |              | Main Part                                     | UART/USART                 | Default | <input type="checkbox"/> Short Circuit allowed functions |
|        |              | High Density Connector pin                    | Other SERIAL Communication | Default |  |
|        |              | Internal Component                            | Analog                     |         |  |
|        |              | Other Pins (Reset, System Control, Debugging) | PWM/Timer                  |         |  |

**POWER LIMITS** depend on the board used

CIP0/COPI have previously been referred to as MISO/MOSI




SKU code: ASX00031  
Full Pinout - Page 4 of 7  
Last update: 23 Feb, 2023

DOCS . ARDUINO . CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

TOP VIEW

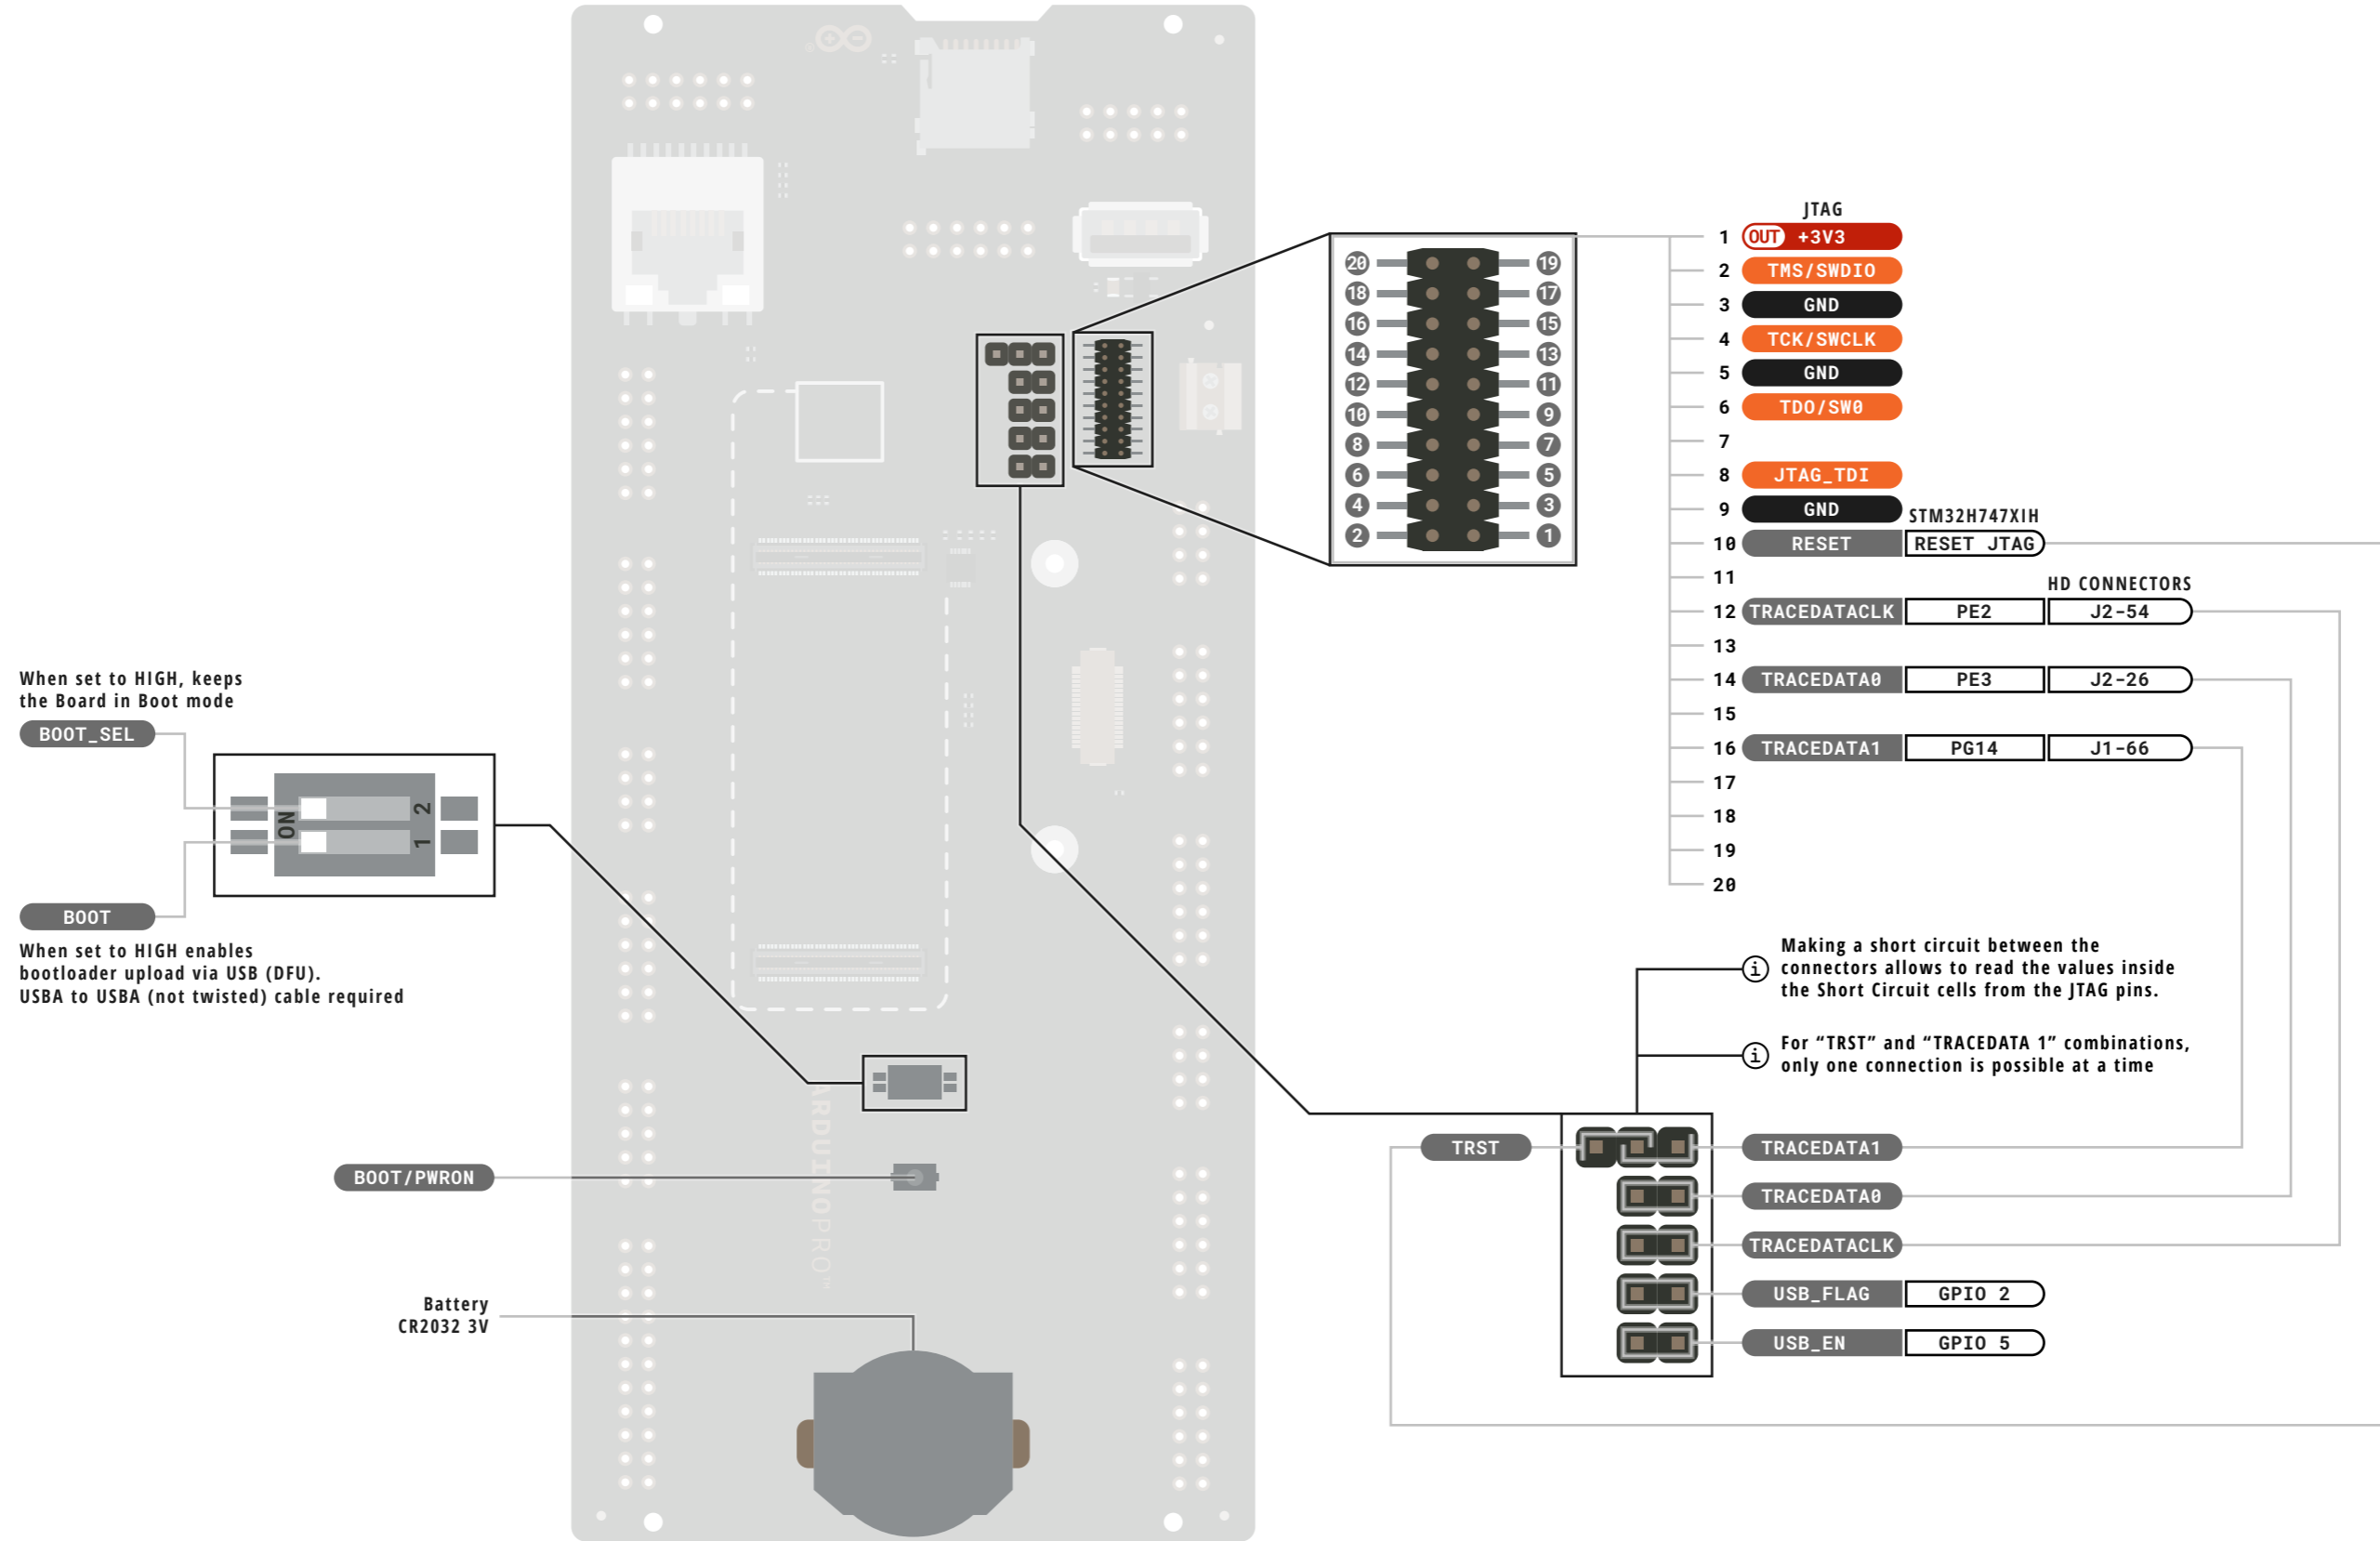

**Legend:**

Power	Power Input	GPIO Digital External	I2C	Default	LED
Ground	Power Output	Analog External	SPI	Default	RGB LED
		Main Part	UART/USART	Default	Short Circuit allowed functions
		High Density Connector pin	Other SERIAL Communication	Default	
		Internal Component	Analog	Default	
		Other Pins (Reset, System Control, Debugging)	PWM/Timer		

**POWER LIMITS**  
depend on the board used

CIP0/COPI have previously been referred to as MISO/MOSI


**PORTENTA BREAKOUT**

SKU code: ASX00031  
Full Pinout - Page 5 of 7  
Last update: 23 Feb, 2023

**DOCS . ARDUINO . CC**

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

TOP VIEW

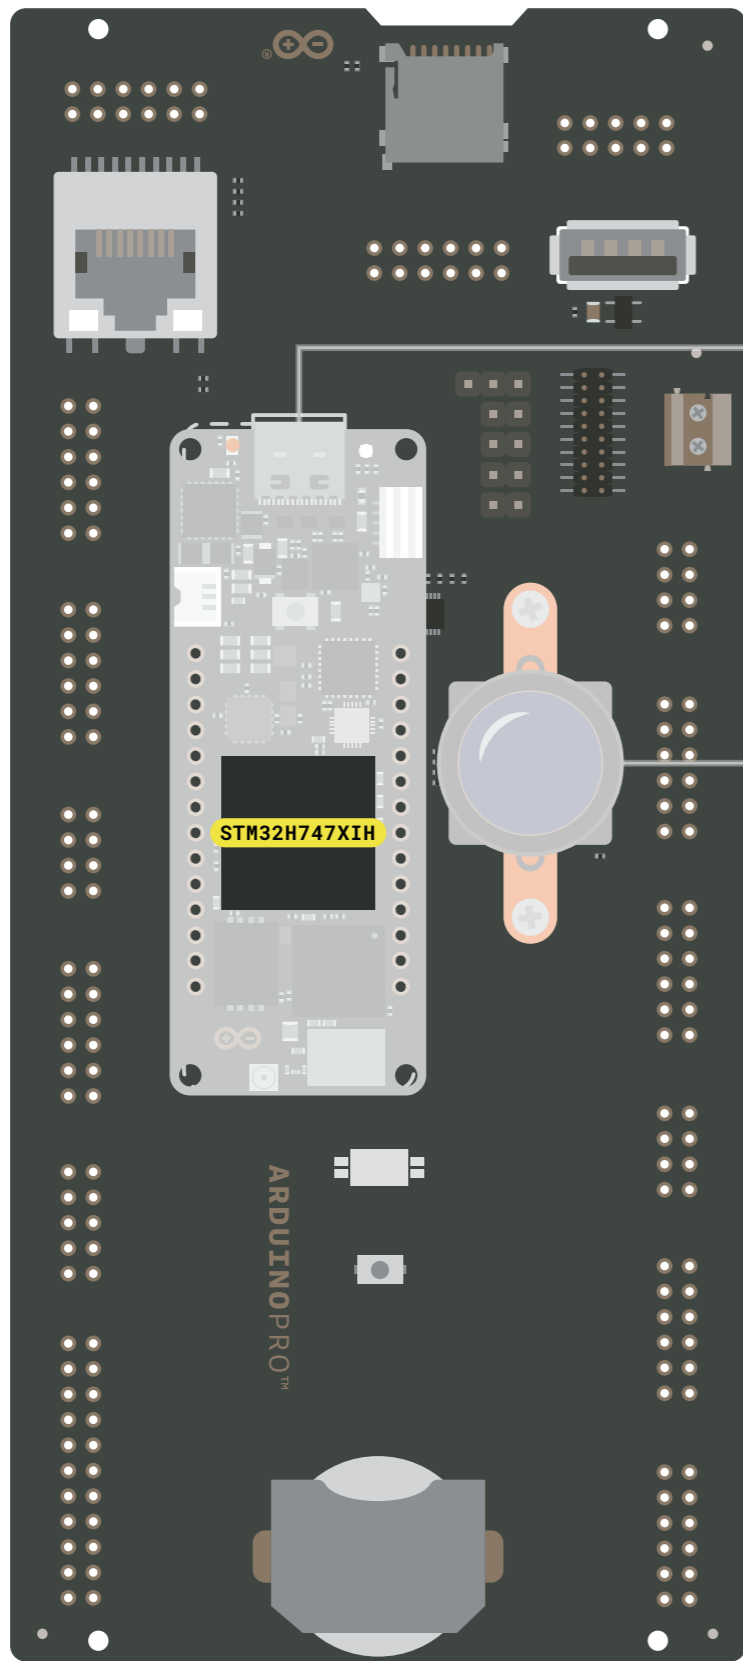

Portenta Board


Open MV Global Shutter Camera Module

! Not currently supported

STM32H747XIH

ARDUINOPRO™

BOTTOM VIEW

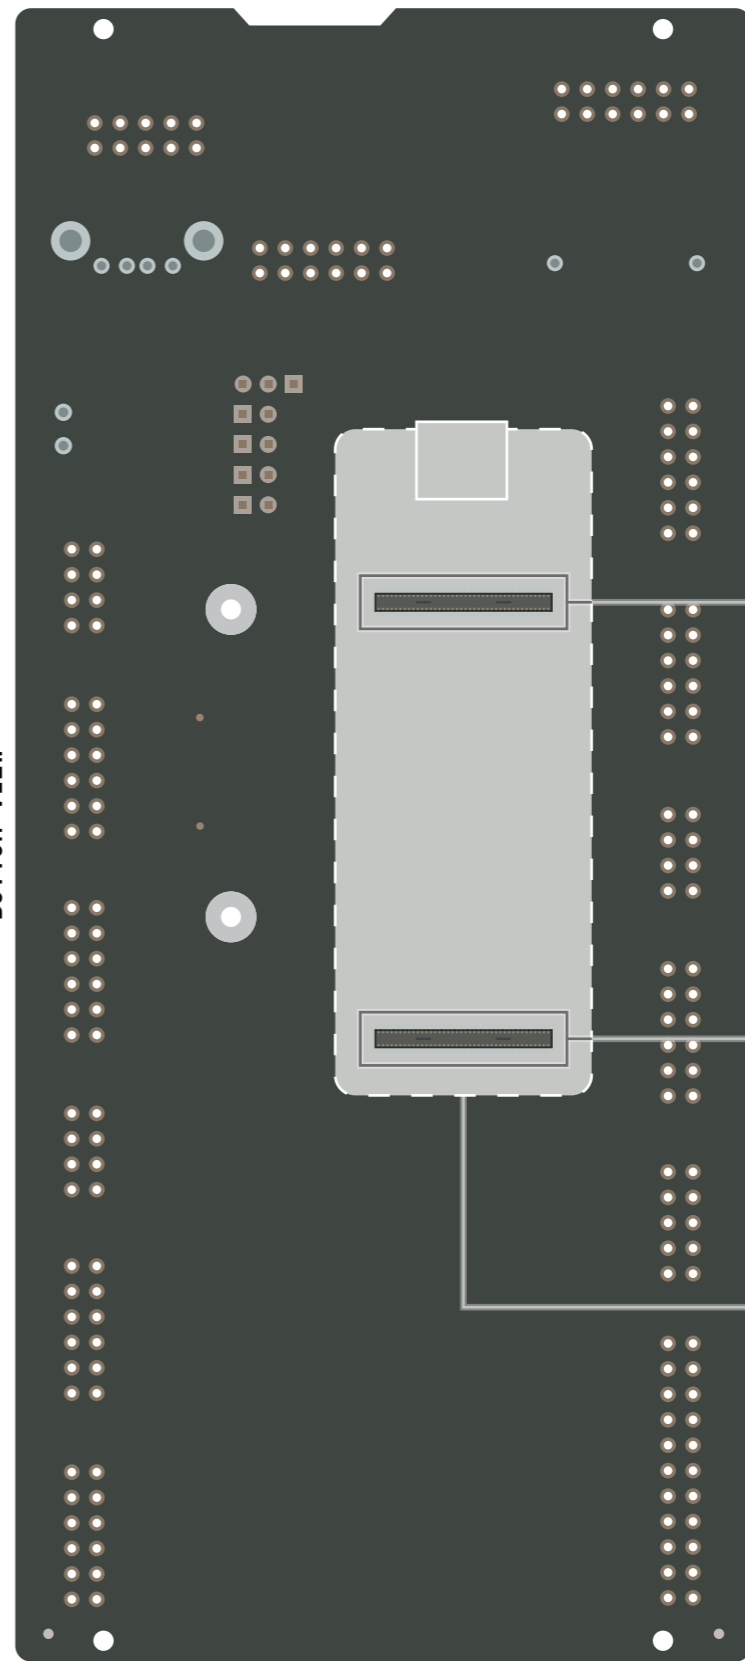

J1

J2

Additional Portenta Shield

Legend:

- Power
- IN Power Input
- OUT Power Output
- Ground

- GPIO Digital External
- Analog External
- Main Part
- High Density Connector pin
- Internal Component
- Other Pins (Reset, System Control, Debugging)

- I2C
- SPI
- UART/USART
- Other SERIAL Communication
- Analog
- PWM/Timer
- D Default
- D Default
- D Default
- D Default

- + LED
- RGB LED
- Short Circuit allowed functions

**⚠ POWER LIMITS** depend on the board used

**i** CIP0/COPI have previously been referred to as MISO/MOSI



SKU code: ASX00031  
Full Pinout - Page 6 of 7  
Last update: 23 Feb, 2023

DOCS . ARDUINO . CC




This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

### J1-Female

SWO	79	80	
SWCK	77	78	
SWDIO	75	76	
RESET	73	74	
	71	72	OUT V-SDCARD
	69	70	
	67	68	DMIC D0
	65	66	DMIC CK
SDC D3	63	64	OUT VSYS
SDC D2	61	62	I2S D0
SDC D1	59	60	I2S DI
SDC D0	57	58	I2S WS
SDC CMD	55	56	I2S MCK
VSYS	53	54	GND
CAN1 RX	51	52	
CAN1 TX	49	50	
GND	47	48	IN VIN
I2C1 SD6	45	46	I2C0 SCL
I2C1 SDA	43	44	I2C0 SDA
VIN	41	42	GND
UART1 CTS	39	40	UART0 CTS
UART1 RTS	37	38	UART0 RTS
UART1 RX	35	36	UART0 RX
UART1 TX	33	34	UART0 TX
GND	31	32	IN VIN
USB1 ID	29	30	
USB1 D-	27	28	USB0 D-
USB1 D+	25	26	USB0 D+
USB1 VBUS	23	24	
VIN	21	22	GND
ETH L2	19	20	DSI CK-
ETH L1	17	18	DSI CK+
	15	16	DSI D0-
	13	14	DSI D0+
	11	12	DSI D1-
	9	10	DSI D1+
ETH B-	7	8	
ETH B+	5	6	
ETH A-	3	4	
ETH A+	1	2	

SD Card

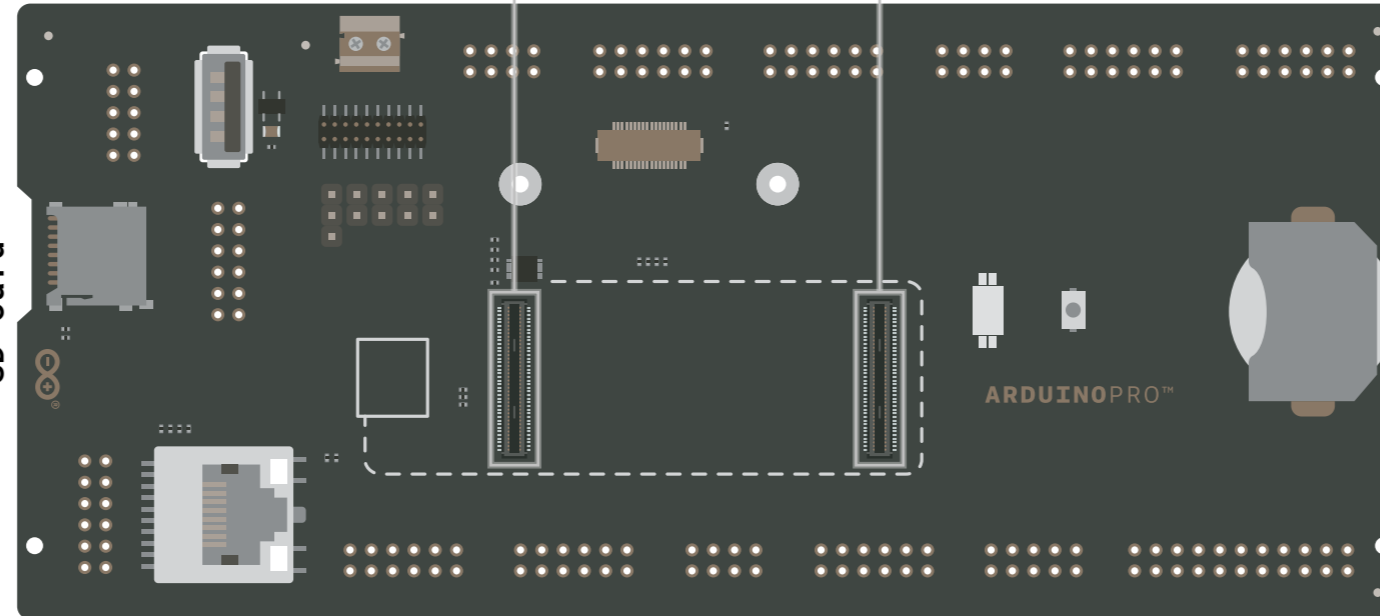

TOP VIEW

### J2-Female

CAM D7	2	1	FORCE_BOOTLOADER
CAM D6	4	3	BOOT_SOURCE
CAM D5	6	5	POWER_ON_REQ
CAM D4	8	7	COINCELL
CAM D3	10	9	
CAM D2	12	11	
CAM D1	14	13	
CAM D0	16	15	
CAM VS	18	17	
CAM CLK	20	19	
CAM HS	22	21	
GND	24	23	OUT VCC/+3V3
UART2 TX	26	25	UART3 TX
UART2 RX	28	27	UART3 RX
	30	29	
	32	31	
VCC	34	33	GND
SPI1 CS	36	35	
SPI1 CK	38	37	
SPI1 CIP0	40	39	
SPI1 COPI	42	41	
GND	44	43	OUT VCC/+3V3
GPIO 0	46	45	I2C2 SDA
GPIO 1	48	47	I2C2 SCL
GPIO 2	50	49	SAI CK
GPIO 3	52	51	SAI FS
GPIO 4	54	53	SAI D0
GPIO 5	56	55	
GPIO 6	58	57	GND
PWM 6	60	59	PWM 1
PWM 7	62	61	PWM 2
PWM 8	64	63	PWM 3
PWM 9	66	65	PWM 4
PWM 10	68	67	PWM 5
GND	70	69	OUT VCC/+3V3
ADC VREF-	72	71	OUT ADC VREF+
ADC A4	74	73	ADC A0
ADC A5	76	75	ADC A1
ADC A6	78	77	ADC A2
ADC A7	80	79	ADC A3

#### Legend:

Power	Power Input	GPIO Digital External	I2C	Default	POWER LIMITS
Ground	Power Output	Analog External	SPI	Default	depend on the board used
		Main Part	UART/USART	Default	CIP0/COPI have previously been referred to as MISO/MOSI
		High Density Connector pin	Other SERIAL Communication	Default	
		Internal Component	Analog	Default	LED
		Other Pins (Reset, System Control, Debugging)	PWM/Timer	Default	RGB LED
				Short Circuit allowed functions	



SKU code: ASX00031  
Full Pinout - Page 7 of 7  
Last update: 23 Feb, 2023

DOCS.ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.